QSMDB0605xx


Q-smart D3H Horizonntal Kiosk




Document Nr: IG30 (EN)

Issue date: 19.09.2019 Revision Nr./Date: Page/Total: 00/


QUICK INSTALLATION GUIDE

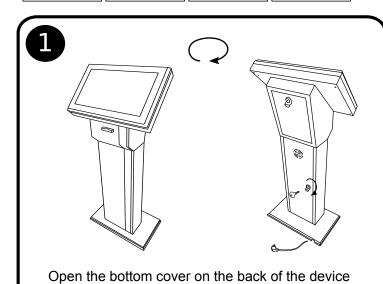


with the Q-smart ticket machine key.

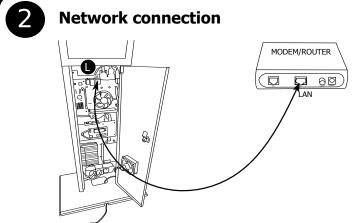


Connect the Ethernet output of the ticket machine to your modem, shown as (L) in the picture. You can find the IP address of the device on the screen when the application starting.

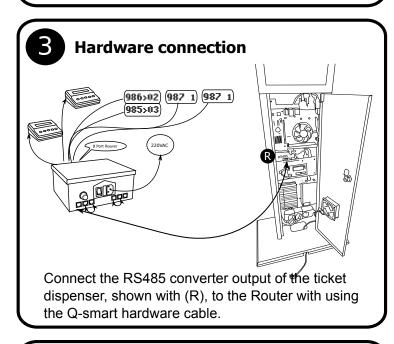

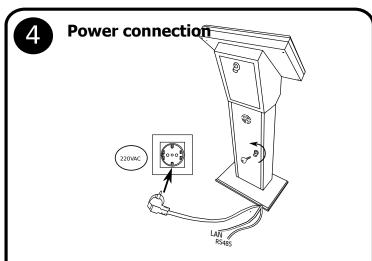


After making all connections, close the cover on the back of the device. Connect the device to 220V AC.

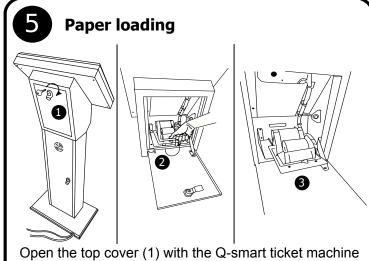

key. Unscrew the screw in section (2) and pull the rail

towards you. Load paper in section (3).

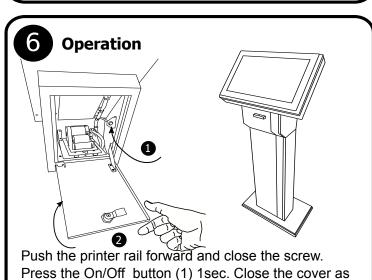

shown in the picture (2) and lock the cover with Q-

smart ticket machine key.