QSMDB0702xx

Q-smart E3 Reflex S Kiosk





Document Nr: IG 31(EN)

Issue date: 20.09.2019


Revision Nr./Date: Page/Total:


QUICK INSTALLATION GUIDE

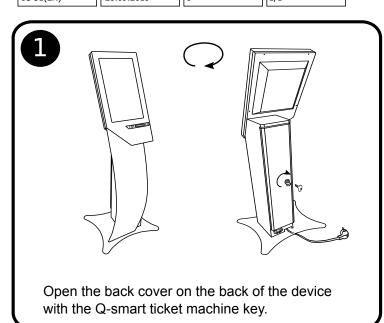

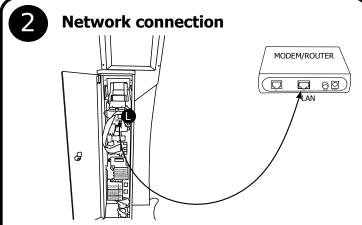


Connect the Ethernet output of the ticket machine to your modem, shown as (L) in the picture. You can find the IP address of the device on the screen when the application starting.

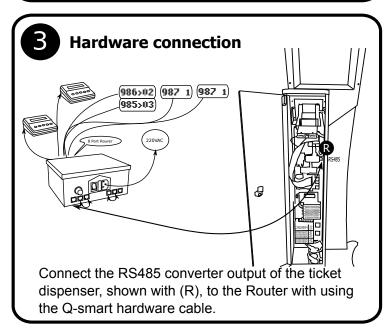


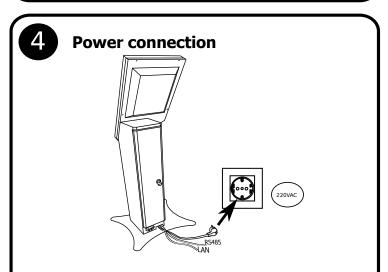

After making all connections, close the cover on the back of the device. Connect the device to 220V AC.

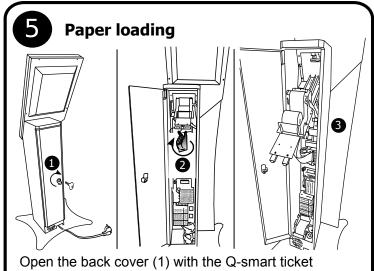

machine key. Unscrew the screw in section (2) and pull the rail towards you. Load paper in section (3).

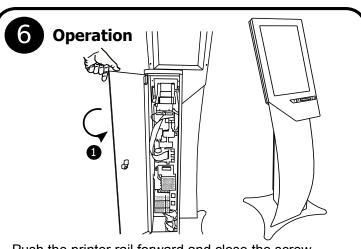

Push the printer rail forward and close the screw. Close the cover as shown in the picture (1) and lock the cover with Q-smart ticket machine key. Power On device.